


Base plates

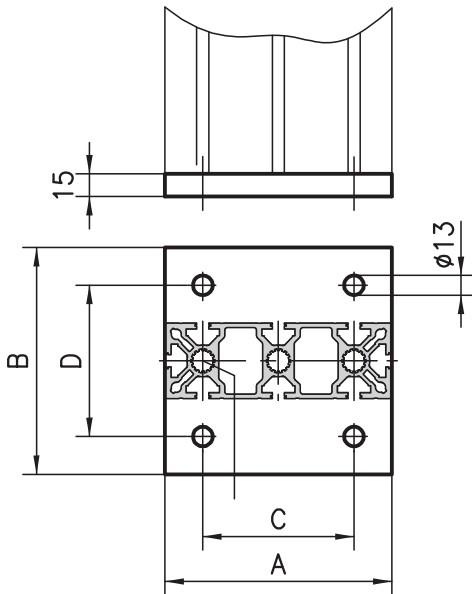

Application

When structures are subjected to heavy loads, structural stability is extremely important. The solid steel base plate meets this requirement in every respect, guaranteeing a high level of safety.

Specification

Steel, gunmetal finish

Fixing kit*


Bolt(s) M16x30



Order data	Order number				
Extrusion	A	B	C	D	
50x50	150	50	120	-	A47-50*
50x150	150	150	100	100	A47-70*
100x100	200	100	150	70	A47-80*
40x40	120	40	90	-	C47-40*
80x80	150	80	120	50	C47-80*

* Fixing kit: add -S to the order number
Example:: A47-50-S

Foot plates

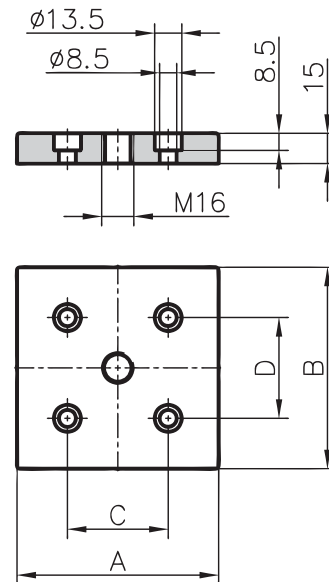

Application

For use with extrusions without a central core hole when fixing levelling feet and casters.

Specification

Aluminium, anodised in natural colours

Fixing kit*


Screws and threaded inserts



Order data	Order number				
Extrusion	A	B	C	D	
100x100	100	100	50	50	A80-20*
80x80	80	80	40	40	C80-20*
40x80	40	80	-	40	C80-24*

* Fixing kit: add -S to the order number
Example: A80-20-S

Floor bolting bracket

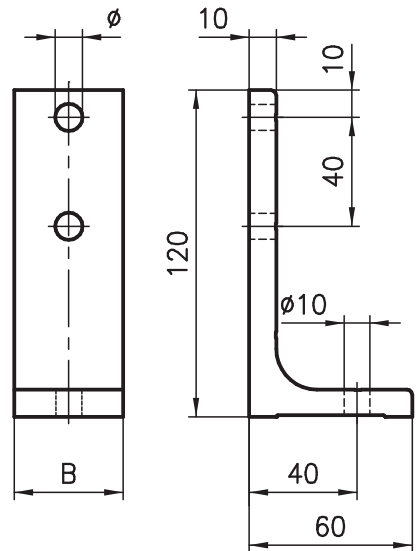

Application

A floor bolting bracket is used when a system has been aligned and has to be bolted to the floor. It is very easy to use because its height can be adjusted in the extrusion slot and the bracket can be easily secured to the floor using anchor bolts.

Specification

Aluminium, anodised in natural colours

Fixing kit*


2 screws, 2 threaded plates, 2 washers



Order data	Order number		
Extrusion base	B	ø	
50/40	40	8.5	A47-00*
30	30	6.5	B47-00*

* Fixing kit: add -S to the order number
Example: A47-00-S

Double bolting bracket

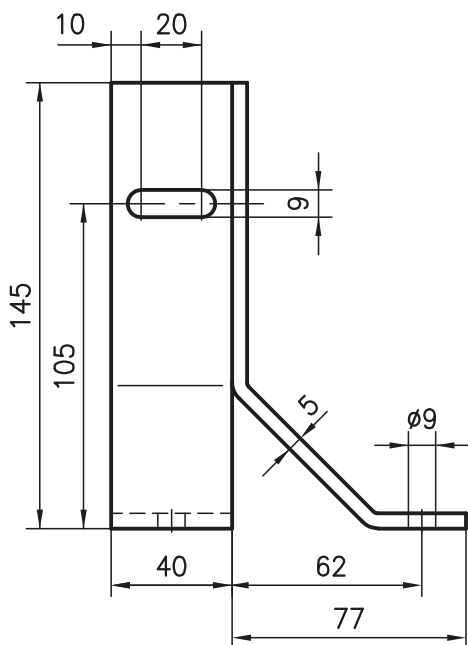


Application


An advance on the normal floor bolting bracket, with the added advantage that it can be used together with large levelling feet (Ø 90). The double bolting bracket also secures the supporting extrusions in two directions.

Specification

Steel, powder-coated in black

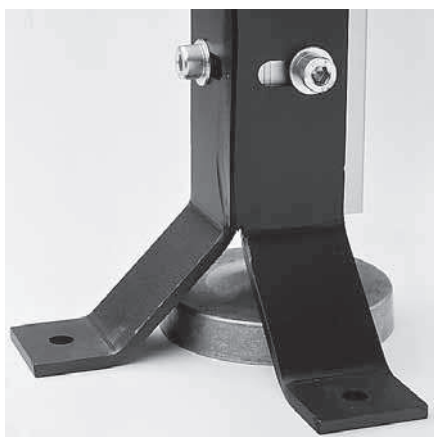

Single bolting bracket

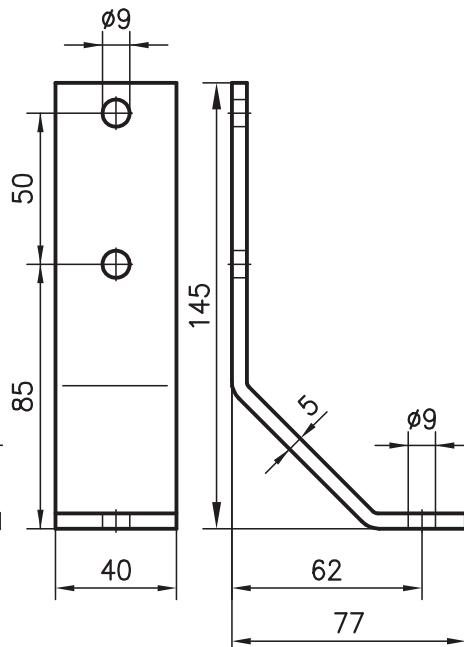

Application

For easy fixing to the floor. As with the double bolting bracket, this single bolting bracket can be combined with a levelling foot.

Specification

Steel, powder-coated in black


Fixing kit*

- 2 screws
- 2 (3) threaded plates
- 2 washers

*Fixing kit: add -S to the order number

Order data	Order number
Single bolting bracket	A47-21(-S)*

Single bolting bracket reinforced

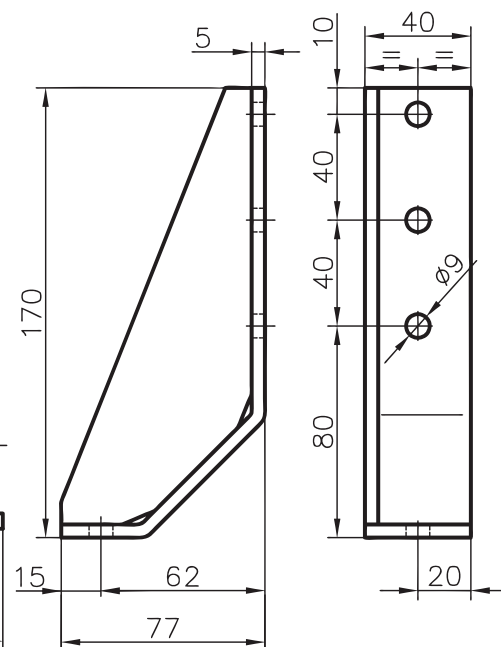


Application

Same as the aluminium floor bolting bracket with the added advantage that it can be used together with large levelling feet Ø 90.



Specification

Steel, powder-coated in black

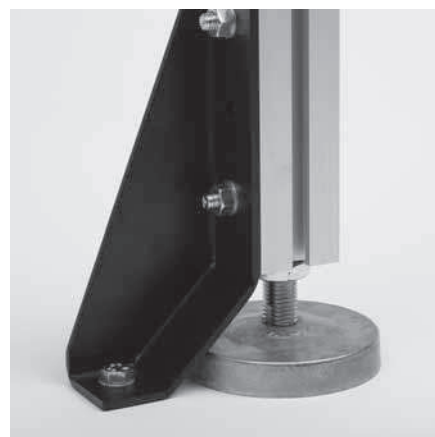

Order data	Order number
Single bolting bracket	A47-22(-S)*

Leg bolt-down socket


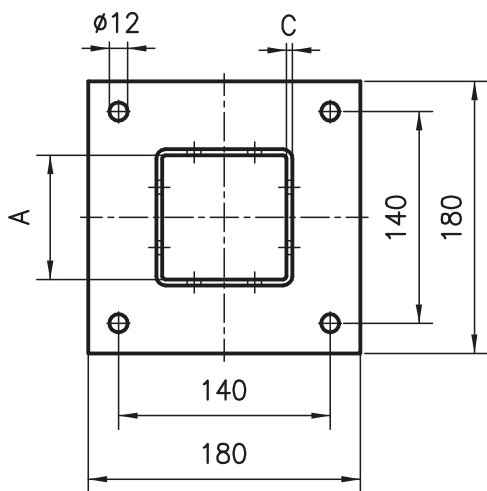
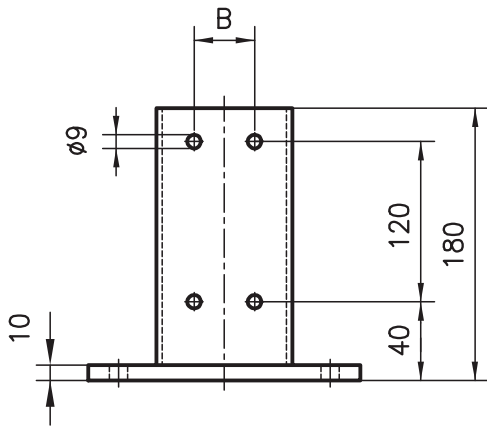


Application

The bolt-down socket is used in applications where the legs have to be very firmly secured to the ground. The extrusion can be adjusted easily within the guide socket and can be secured in place using the fixing kit included. The bolt-down socket should be chosen, from the three available, to suit the space available.

Specification


Steel, powder-coated in black

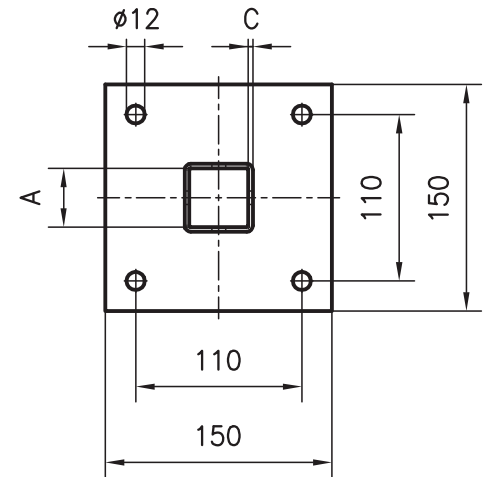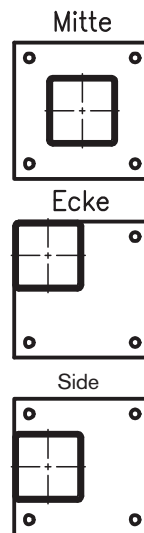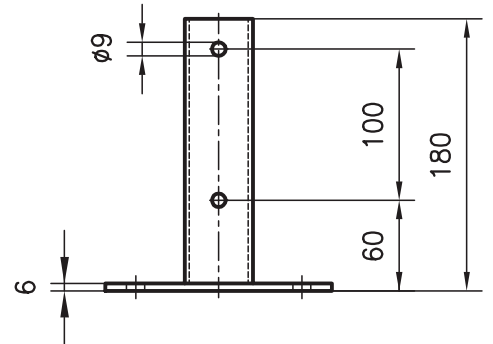

Fixing kit*

(applies to all types)

8 cylinder screws, 8 threaded plates
8 washers

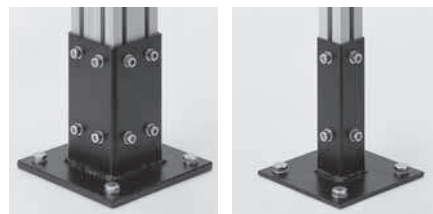

Fixing kit*

(applies to all types)

4 cylinder screws, 4 threaded plates,
4 washers

Order data					Order number	Order data					Order number
	A	B	C	Type			A	B	C	Type	
Extrusion 80x80	82	40	4	Middle	C47-36	Extrusion 40x40	41	-	2	Middle	C47-32
				Corner	C47-37					Corner	C47-33
				Side	C47-38					Side	C47-34
*Fixing kit					C47-36-S	*Fixing kit					C47-32-S
						Extrusion 50x50	52	-	4	Middle	A47-32
										Corner	A47-33
										Side	A47-34
						*Fixing kit					A47-32-S